S t a r X

HIGH PERFORMANCE PAD

Teca-Print

pad properties

the highly developed StarX pad possess the following outstanding features:
antistatic behaviour – outstanding antistatic behavior allows for a perfect ink transfer without practically any ink splashes on the edges or ink remaining on the pad.
resistance – unparalleled mechanical resistance enables longer pad lifespans, even when printing over sharp edges of the printed part.
no swelling – swelling on the pad surface from solvents, ink and repeated pad to part compressions are eliminated.
user friendly – StarX pads require only a few seconds to be activated by briefly cleaning the surface of the pad with thinner. These pads should only be stored shaded from direct sunlight and not in contact with other objects.

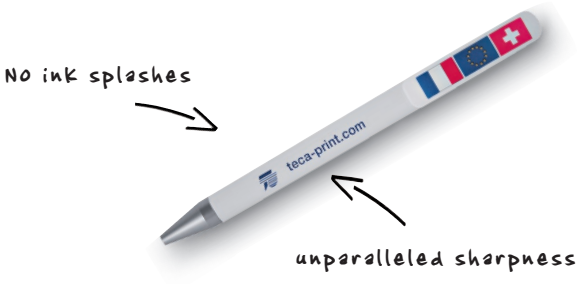

pad types

The StarX high performance pads can be purchased in varying degrees of hardness. On delivery their hardness tolerance is +\-2 Shore-00.

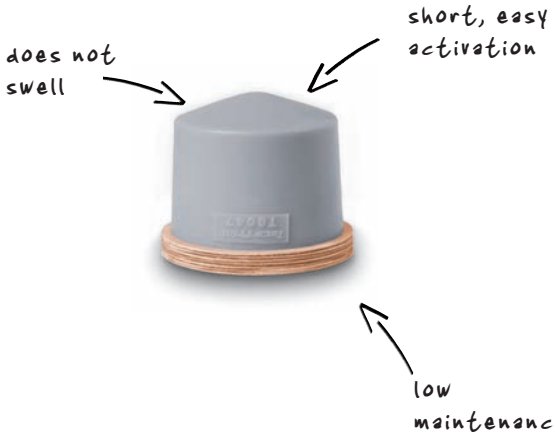

Shore	remarks
64 Shore-00	very hard, e.g. for textured surfaces
54 Shore-00	normal hardness – most often used hardness
44 Shore-00	soft – especially good for rounded or curved components
39 Shore-00	very soft – for delicate and breakable components

The pad hardness must be stated on ordering the pad.

e.g.: T0142-64	T = pad	0142 = pad number	-64 = pad hardness
e.g.: 1497-44	T = pad	1497 = pad number	-44 = pad hardness

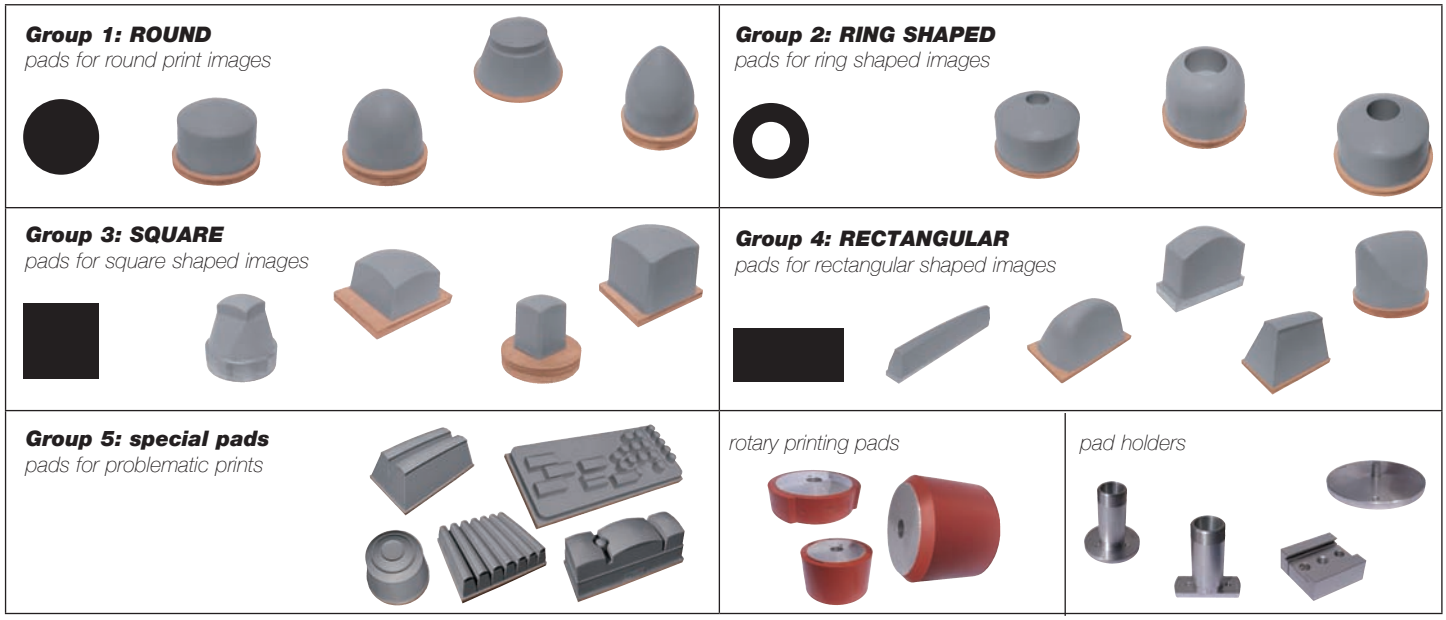

Teca-Print
Teca-Print AG
Postfach
Bohlstrasse 17
CH-8240 Thayngen
Tel. +41 (0)52 645 2000
Fax +41 (0)52 645 2102
info@teca-print.com
teca-print.com

706 000 237 / 08.15